



SIMSIRIKIS
CATERING & LAUNDRY EQUIPMENT
SHIP SUPPLIES



DRYING

SINGLE POCKET DRYERS ADVANCE SR-28/35 TP2



CHARACTERISTICS

TP2

- User friendly and totally programmable 7" TP2 touch screen
- USB Connection. PC software free of charge for programming, traceability, data analysis...
- Videos on display (ads, instructions)
- 37 languages

OUTSTANDING FEATURES

- Reversing drum action as standard
- Stainless steel drum as standard
- Frequency inverter as standard

EFFICIENCY

- MIXED FLOW - New 'optimized' system of mixed airflow
- Big fluff filter

VERSATILITY

- Make to order - customisation
- WET CLEANING
- OPL > Multivending - Standard OPL model easily trasformable to coin laundry uses

CONNECTIVITY

- FagorKonnnect IoT
- Remote technical service
- Managemant of laundries: OPL and COIN
- Remote payment

ERGONOMICS

- Drawer as fluff filter, made of stainless steel
- Biggest door diameters
- Opening sense of door adjustable on site

MAINTENANCE

- Hinged panel: easy and ergonomic access
- Technical menu: statistics, alarm, autotest, data recovery for technicians and maintenance

OTHERS

- Grey skinplate outer casing, stainless steel look
- SOFT TOUCH - new drum with stamped holes
- COOL DOWN - anti-wrinkle at the end of the cycle
- Heating options: electric, gas and steam
- CE approved

OPTIONS


- iDRY - Intelligent humidity control with new drum inlet temperature control
- Double doorglass
- Reverse door opening
- FK - Integrated Fire Extinguishing System
- New dosing/vaporizing system
- FagorKonnnect-IoT communication kit
- Tropicalized model
- Stainless steel outer casing
- Stainless steel front panel
- Stainless steam battery
- Low pressure steam battery
- Wooden packing
- Rear panel external air + filter
- Fluff filter with grid 0,6mm (standard is 0,3mm)
- Fluff filter with grid 1,2mm (standard is 0,3mm)
- Ship voltage for electric models: 440V III 50/60 Hz No neutral

TECHNICAL DATA

SINGLE POCKET DRYERS | ADVANCE | SR-28/35 TP2

UNIT.		SR-28 TP2		SR-35 TP2	
CAPACITY					
Capacity 1/18	Kg	31		37	
Capacity 1/20	Kg	28		33	
Hourly Output ADVANCE*	Kg/h	56-53		70-65	
Evaporation capacity ADVANCE*	l/h	30,9		32,1	
DRUM					
Ø Drum	mm	947		947	
Ø Door	mm	802		802	
Door center height	mm	1.040		1.040	
Load hole bottom height	mm	640		640	
Drum length	mm	780		936	
Drum volume	l	550		660	
POWER					
Drum motor power	Kw	0,55		0,55	
Fan motor power ADVANCE	Kw	0,55		0,55	
Electric heating power ALL RANGES	Kw	30		36	
Total electric power (elec.model) ADVAN.	Kw	31,15		37,15	
Gas heating power ALL RANGES	Kw	41		41	
Total electric power (gas model) ADVAN.	Kw	1,15		1,15	
Steam heating power ALL RANGES	Kw	50,1		50,1	
Steam heating power (gas model) ADVAN.	Kw	1,15		1,15	
CONNECTIONS		ELECTRICAL	STEAM / GAS	ELECTRICAL	STEAM / GAS
Tension 230V - I + N + T	Nº x mm2 / A	-	3 x 1,5 / 20A	-	3 x 1,5 / 20A
Tension 230V - III + T	Nº x mm2 / A	4 x 35 / 100A	3 x 1,5 / 20A	4 x 50 / 125A	3 x 1,5 / 20A
Tension 400V - III + N + T	Nº x mm2 / A	5 x 16 / 63A	3 x 1,5 / 20A	5 x 16 / 63A	3 x 1,5 / 20A
Ø Gas inlet	BSP	1/2"		1/2"	
Ø Steam inlet	BSP	1"		1"	
Ø Condensed (Steam models)	BSP	1"		1"	
DIMENSIONS / PACKING DIMENSIONS					
Net Width / Gross Width	mm	985/1.065		985/1.065	
Net Depth / Gross Depth	mm	1.054/1.154		1.210/1.310	
Net Height / Gross Height	mm	1.975/2.080		1.975/2.080	
Height without heating battery	mm	-		-	
Net weight / Gross weight	Kg	230/260		260/285	
OTHERS					
Max airflow ADVANCE	m3/h	1.200		1.200	
Ø Fume exhaust	mm	200		200	
Sound level ADVANCE	dB	65		65	

* It may vary depending on the type of heating, filter cleanliness or extraction type.

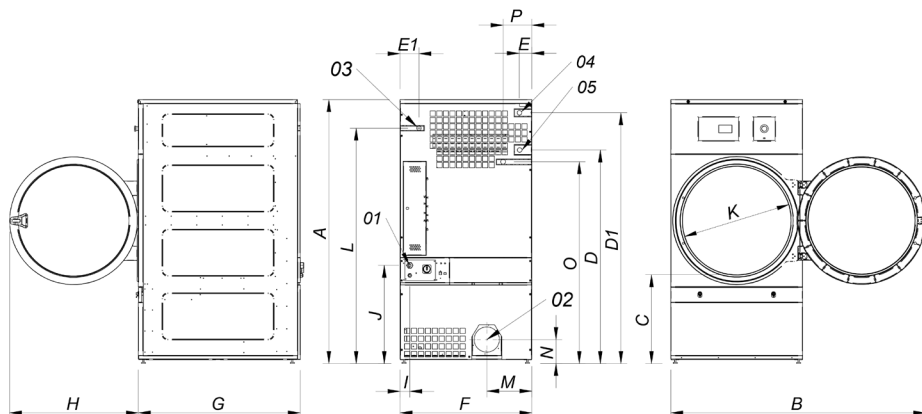

- 01 ELECTRIC CONNECTION
- 02 FUMES OUTLET Ø200
- 03 GAS CONNECTION 1/2"
- 04 STEAM CONNECTION 1"
- 05 CONDENSATE OULET 1"
- 06 SPRINKLER VALVE 3/4"

	A	B	C	D	D1	E	E1	F	G	H	I	J	K	L	M	N	O	P
SR-28	1975	1910	660	1590	1875	102	130	985	1054	970	70	730	802	1760	337	178	1510	215
SR-35	1975	1910	660	1590	1875	102	130	985	1210	970	70	730	802	1760	337	178	1510	215