



# DRYING

## STACK DRYERS CONCEPT SR-2-11/14/18 M

### CHARACTERISTICS

#### M PROGRAMMER

- New M programmer: push buttons to control temperature and time.

#### OUTSTANDING FEATURES

- Reversing drum action as standard.
- Stainless steel drum as standard.
- Frequency inverter as standard.

#### EFFICIENCY

- MIXED FLOW - mixed axial-radial airflow.
- Big fluff filter.

#### VERSATILITY

- Make to order - customisation.
- OPL > Multivending - Standard OPL model easily trasformable to coin laundry uses.

#### ERGONOMICS

- Drawer as fluff filter, made of stainless steel.
- Biggest door diameters.

#### MAINTENANCE

- Hinged panel: easy and ergonomic access.
- Technical menu: statistics for technicians and maintenance with external console (with console option).

#### OTHERS


- Grey skinplate outer casing, stainless steel look.
- FK - Integrated Fire Extinguishing System.
- SOFT TOUCH - new drum with stamped holes.
- COOL DOWN - anti-wrinkle at the end of the cycle.
- Heating options: electric, gas.
- CE approved.

### OPTIONS

- Screen in M programmer (2 units).
- Double dooglass.
- Fluff filter grid 0,3 mm (standard in STACK is 0,6 mm)
- Stainless steel front and side panels.
- Front panel in stainless steel.
- Maritime ooden packing.
- Ship voltage for electric models: 440V III 50/60 Hz No neutral.
- Other voltages available



TECHNICAL DATA	UNIT.	SR-2-11 M	SR-2-14 M	SR-2-18 M			
<b>CAPACITY</b>							
Capacity 1/18	Kg	24	30	36			
Capacity 1/20	Kg	22	28	34			
Hourly Output (electr // gas)	Kg/h	31,6 // 30,6	34,4 // 33,8	36,2 // 36			
Evaporation capacity (electr // gas)	l/h	15,8 // 15,3	17,2 // 16,9	18,1 // 18			
<b>DRUM</b>							
Ø Drum	mm	750	750	750			
Ø Door	mm	574	574	574			
Door center height	mm	547 / 1.522	547 / 1.522	547 / 1.522			
Load hole bottom height	mm	260 / 1.235	260 / 1.235	260 / 1.235			
Drum length	mm	475	610	746			
Drum volume	l	210	269	330			
<b>POWER</b>							
Drum motor power	Kw	0,37 x 2	0,37 x 2	0,37 x 2			
Fan motor power	Kw	0,25 x 2	0,25 x 2	0,25 x 2			
Electric heating power	Kw	12 x 2	12 x 2	12 x 2			
Total electric power (elec.model)	Kw	25,34	25,34	25,34			
Instant propane gas consumption (G31)	Kw	12 x 2	12 x 2	12 x 2			
Instant natural gas consumption (G20)	Kg/h	1,03 x 2	1,03 x 2	1,03 x 2			
Gas heating power	m3/h	1,27 x 2	1,27 x 2	1,27 x 2			
Total electric power (gas model)	Kw	1,34	1,34	1,34			
<b>CONNECTIONS</b>		<b>ELECTRIC.</b>	<b>GAS</b>	<b>ELECTRIC.</b>	<b>GAS</b>	<b>ELECTRIC.</b>	<b>GAS</b>
Tension 230V - I + N + T	N° x mm2 / A	-	3 x 1,5 / 20A	-	3 x 1,5 / 20A		3 x 1,5 / 20A
Tension 230V - III + T	N° x mm2 / A	4 x 25 / 80A	3 x 1,5 / 20A	4 x 25 / 80A	3 x 1,5 / 20A	4 x 25 / 80A	3 x 1,5 / 20A
Tension 400V - III + N + T	N° x mm2 / A	5 x 10 / 40A	3 x 1,5 / 20A	5 x 10 / 40A	3 x 1,5 / 20A	5 x 10 / 40A	3 x 1,5 / 20A
Ø Gas inlet	BSP	1/2"		1/2"		1/2"	
<b>DIMENSIONS / PACKING DIMENSIONS</b>							
Net width / Gross width	mm	785 / 865		785 / 865		785 / 865	
Net Depth / Gross Depth	mm	972 / 1.055		1.106 / 1.189		1.242 / 1.325	
Net Height / Gross Height	mm	1.980 / 2.126		1.980 / 2.126		1.980 / 2.126	
Net weight / Gross weight	Kg	260 / 268		275 / 293		290 / 317	
<b>OTHERS</b>							
Max airflow	m3/h	500 x 2		500 x 2		500 x 2	
Ø Fume exhaust	mm	200		200		200	
Sound level	dB	64		64		64	

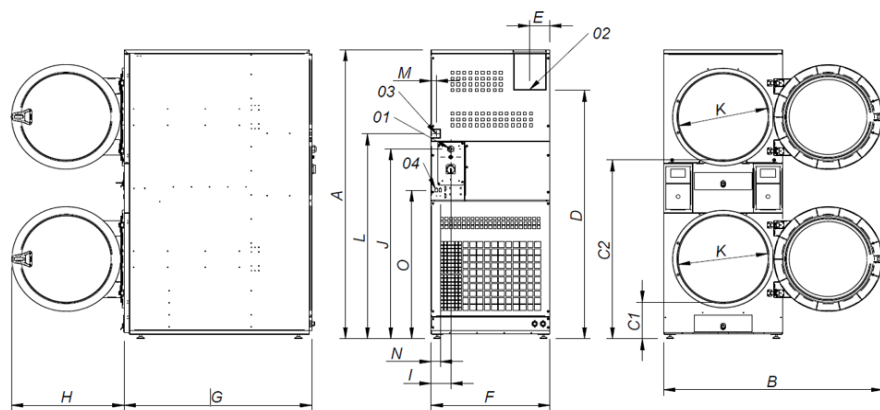

01 ELECTRIC CONNECTION  
02 FUMES OUTPUT Ø200  
03 GAS INLET 1/2"  
04 ETHERNET CONNECTION  
(ONLY TOUCH CONTROL)

	A	B	C1	C2	D	E	F	G	H	I	J	K	L	M	N	O
SR-2-11 M	1980	1447	259	1234	1680	135	785	972	735	130	1275	575	1406	35	60	1018
SR-2-14 M	1980	1447	259	1234	1680	135	785	1106	735	130	1275	575	1406	35	60	1018
SR-2-18 M	1980	1447	259	1234	1680	135	785	1242	735	130	1275	575	1406	35	60	1018