



SIMSIRIKIS
CATERING & LAUNDRY EQUIPMENT
SHIP SUPPLIES



PROFESSIONAL
LAUNDRY

PROFESSIONAL DRYERS CONCEPT / ECONOMIC LINE SRP-08/10 M / SCP-10 M



SRP-08/10 M



SCP-10 M

CHARACTERISTICS

OUTSTANDING FEATURES

M PROGRAMMER: selection of time and temperature, user friendly and versatile (OPL or coin laundry version)

- Reduced drying times (less than 45 minutes)
- 6,75 kw heating, option 4,5 kW (4,5 kW in SCP)

VERSATILITY

- OPL <> COIN
- Standard models can be programmed as OPL or coin laundry version, central pay, etc.
- SINGLE <> STACKED
 - Models can be stacked on top of a washer or on another dryer.
 - Control panels can be assembled between both drums for better ergonomics.(Except SCP Model)
- Ideal for multiple solutions: hotels, hostels, campings, coin laundries, facility services (mops), gyms, etc.

EFFICIENCY

- Optimised airflow.
- Wide fluff filter as drawer.
- Efficient design.

ROBUSTNESS

- Outer casing in grey skinplate. (White lacquered in SCP model)
- Robust aluminium big door.
- Drawer as fluff filter. (not in the door but as an specific drawer)
- Industrial fan and powerful airflow.
- Sturdy construction of the dryer structure and panels.

OTHERS

- FULL SCREEN FILTER: drawer fluff filter, not in the door.
- CE approved product.
- New gas heated models.


OPTIONS

- Stainless steel outer casing. (Except SCP Model)
- AISI 304 stainless steel drum. (Except SCP Model)
- Reverse door opening.
- Control panel in the bottom.
- (stacked dryer)
- Plinth for better ergonomics.
- Maritime voltage 440V III 50/60 Hz No neutral.
- Voltage 400V III / 230V I / III-60 Hz.
- Coin/token kit.

TECHNICAL DATA

PROFESSIONAL DRYERS | CONCEPT / ECONOMIC LINE | SRP-08/10 M / SCP-10 M

	UNIT	SRP-08 M		SRP-10M / SCP -10 M	
CAPACITY & DRUM					
Capacity 1:20	Kg	8		10	
Volume (litres)	l	160		200	
Drum diameter Ø	mm	590		590	
Drum depth	mm	585		690	
DOOR					
Height center door	mm	554		554	
Height base door	mm	320		320	
Door diameter	mm	480		480	
GENERAL DETAILS					
M control	-	Electronic		Electronic	
USB connection	-	No		No	
Construction	-	Skinplate panels		Skinplate panels / White lacquered	
Plinth	-	OPT		OPT / No	
Coin laundry version	-	Yes		Yes	
Noise level	dB	62		62	
POWER					
Motor	kW	0,37		0,37	
Electric heating	kW	6,75 / 4,5		6,75 / 4,5 // (SCP -10 4,5)	
Gas heating	kW	7		7	
CONNECTIONS		ELECTRIC	GAS	ELECTRIC	GAS
Tension 230V I+N+T 50Hz / 60Hz	Nº x mm2/A	3x10 +T -40A	3 x 1,5 / 10A	3x10 / 40A	3 x 1,5 / 10A
Tension 230V III+T 50Hz / 60Hz	Nº x mm2/A	4x4 -25A	3 x 1,5 / 10A	4x4 / 25A	3 x 1,5 / 10A
Tension 400V III+N+T 50Hz / 60 Hz	Nº x mm2/A	5x2,5 16A	3 x 1,5 / 10A	5x2,5 / 16A	3 x 1,5 / 10A
Tension 440 III +T 60Hz	Nº x mm2/A	4x2,5 16A	2 x 1,5 / 10A	4x2,5 / 16A	2 x 1,5 / 10A
Tension 460/480 III+T 60Hz	Nº x mm2/A	4x2,5 16A	2 x 1,5 / 10A	4x2,5 / 16A	2 x 1,5 / 10A
Fume exhaust Ø	mm	100		100	
Maximum airflow	m³/hour	300		300	
Optimal airflow	m³/hour	200		200	
Outlet pressure	mbar	1,6		1,6	
CONSUMPTIONS					
Electric heating	kW	6,75 / 4,5		6,75 / 4,5 // (SCP -10 4,5)	
Average propane gas consumption	kg/h	0,45		0,45	
Average natural gas consumption	m3/h	0,46		0,46	
DIMENSIONS / PACKING DIMENSIONS					
Net width / Gross width	mm	680 / 710		680 / 710	
Net Depth / Gross Depth	mm	722 / 832		775 / 832	
Net Height / Gross Height	mm	1056 / 1141		1.056 / 1.141	
Net weight / Gross weight	kg	89 / 101		93 / 104	

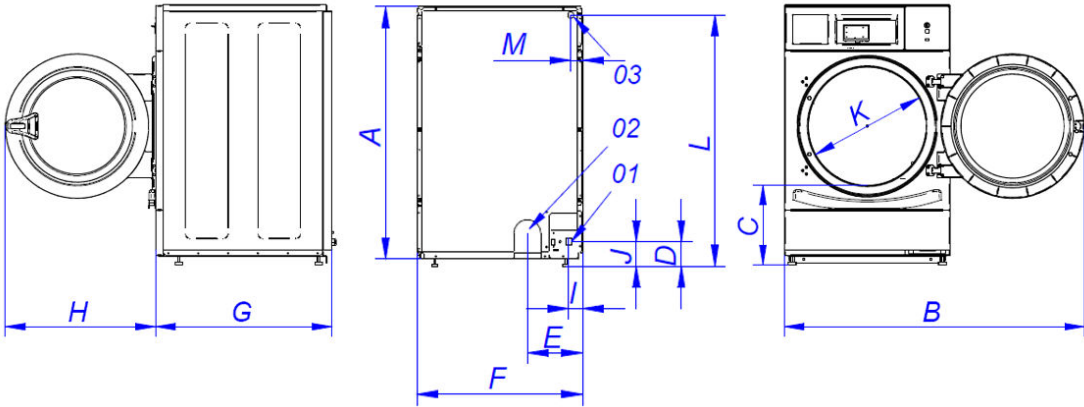

01 ELECTRICAL CONNECTION
02 EXHAUST OUTLET Ø100
03 GAS INLET 1/2" BSP
We recommend at least a free
air intake 4 times the inlet section
0.0314m2 or the equivalent of 10 Pa
of pressure drop
The minimum free air intake in any
case must be: 0.0161m2 (25 in2)

	A	B	C	D	E	F	G	H	I	J	K	L	M
SRP-08	1056	1227	320	140	226	680	722	615	57	91	480	1015	50
SRP/SCP-10	1056	1227	320	140	226	680	722	615	57	91	480	1015	50