



SIMSIRIKIS

CATERING & LAUNDRY EQUIPMENT
SHIP SUPPLIES



WASHING

HIGH SPIN WASHERS LOW AND MEDIUM CAPACITY LA-22 TP2

CHARACTERISTICS

TP2

- User friendly and totally programmable 7" TP2 touch screen
- USB Connection. PC software free of charge for programming, traceability, data analysis...
- Videos on display (ads, instructions)
- 37 languages
- 8 dosing signals as standard

G FACTOR

- High G-Factor: G-FACTOR 450

EFFICIENCY

- Intelligent consumption
- Optimal loading
- Water Recovery tanks ready: KRS
- Low water consumption

VERSATILITY

- Make to order: customisation
- OPL < > COIN
- Electric < > Hot water
- Drain valve < > Pump
- Wet cleaning features

CONNECTIVITY

- Remote technical service
- Management of laundries: OPL and COIN
- Remote payment

ERGONOMICS

- Biggest door diameters: Ø460
- Easy opening/closing system for door lock

MAINTENANCE

- Hinged panel: easy access to parts
- Equivalent parts for all models: contactors, electronic devices, gear
- Technical menu: traceability, error diagnosis

OTHERS

- Grey skinplate outer casing
- Drum and tub in stainless steel AISI 304
- Detergent dispenser with 4 compartments
- Electronic control of imbalance with frequency control
- LOADING AID system: water and rotation control
- CB and WRAS approved product. Option ETL

OPTIONS

- Double drain
- Normally closed valve
- Water recuperator: recirculation of bath water
- Levelling feet
- Auto Weight: automatic weighing sensor system on feet (Includes kit with 6 extra dosing signals)
- Relay card with 6 extra dosing signals: up to 14 signals
- Printer
- FagorKonnnect IoT
- Silicone gasket
- Reversible door opening
- Tropicalized model: protected board
- Steam kit to transform an E or HW heated machine into steam version
- Plinth to level all machines from top
- Plinth to align the doorbase at 850mm)
- Stainless steel outer casing
- Stainless steel front panel
- Maritime voltage for electric models: 440V III 50/60 Hz No neutral
- Coin/token kit
- Delayed door opening in case of power outage
- Plinth for mops with drawer inox/skinplate




 **FagorKonnnect**
Laundry

TECHNICAL DATA

HIGH SPIN WASHERS | LOW AND MEDIUM CAPACITY | LA-22 TP2

	UNIT.	LA-22 TP2	
DRUM			
Load capacity 1:9 / 1:10	Kg	25/22	
Volume	l	220	
Diameter	mm	700	
Depth	mm	560	
GENERAL DETAILS			
Washing speed / Spining speed	r.p.m.	47/1.071	
G Factor	-	450	
Maximum force transmitted	KN	4,12 ±1,4	
Frequency-dynamic force	Hz	16	
Noise level	dB	<70	
Coin laundry version	-	Yes	
Double drain	-	Opt	
Weighing System / Tilting System	-	Opt/No	
DOOR			
Height center door / Height door	mm	765/450	
Diameter	mm	460	
POWER			
Motor	kW	2,2	
Electric heating power	kW	12	
Total electric power (electric model)	kW	12,75	
Total electric power (hw, steam model)	kW	2,2	
CONNECTIONS		ELECTRIC	STEAM / HOT WATER
Tension 230V - I + N + T	N° x mm2 / A	2x16+T / 63A	2x4+T / 32A
Tension 230V - III + T	N° x mm2 / A	3x6+T / 40A	-
Tension 400V - III + N + T	N° x mm2 / A	4x4+T / 32A	-
Steam inlet (Steam model)	inch	1/2"	
Maximum steam consumption (Steam model)	Kg/h	12	
Water inlet	inch	3/4"	
Water main pressure	Kgs/cm ²	2-4	
Maximum water consumption	Lit/h	6,6* / 8,2**	
Drain	inch	3"	
Drainage capacity	Lit/min	200	
DIMENSIONS / PACKING DIMENSIONS			
Net Width / Gross Width	mm	884/945	
Net Depth / Gross Depth	mm	1.003/1.140	
Net Height / Gross Height	mm	1.415/1.700	
Net weight / Gross weight	kg	380/413	
Volume	m3	1,83	

*ECO program / **Energetic 60°C

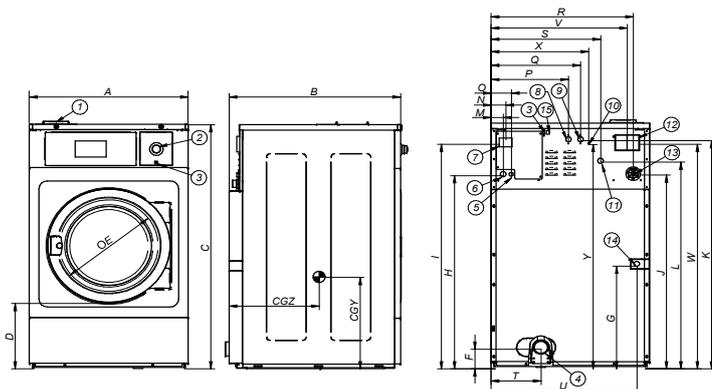

- 1- SOAP DISPENSER
- 2- EMERGENCY STOP
- 3- USB PORT
- 4- DRAIN
- 5- ELECTRIC CONNECTION TO LIQUID SOAP PUMPS
- 6- ELECTRICAL CONNECTION
- 7- MAIN SWITCH
- 8- AUXILIAR WATER INLET
- 9- HOT WATER INLET
- 10- EQUIPOTENTIAL CONNECTION
- 11- COLD WATER INLET
- 12- BLUR OUTPUT / WATER OVERLOAD
- 13- LIQUID SOAP CONNECTION
- 14- STEAM CONNECTION
- 15- ETHERNET PORT

	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	CGY	CGZ	
LA-22	mm	884	1003	1.415	450	460	95	380	1.135	1.303	1.138	1.322	1.207	61	74	101	429	509	902	640	348	914	772	1.303	569	1.297	464	702