



# SIMSIRIKIS

CATERING & LAUNDRY EQUIPMENT  
SHIP SUPPLIES



PROFESSIONAL  
LAUNDRY

PROFESSIONAL DRYERS  
ADVANCE  
SRP-08/10 TP2



SRP-08/10 TP2

## CHARACTERISTICS

### OUTSTANDING FEATURES

- TP2: User friendly and fully programmable microprocessor with a 4,3" touch screen.
- USB connection.
- Remote connection.
- Reduced drying times. (less than 45 minutes)
- 6,75 kw heating, option 4,5 kw.

### VERSATILITY

- OPL <-> COIN
- Standard models can be programmed as OPL or coin laundry version, central pay, etc.
- SINGLE <-> STACKED
  - Models can be stacked on top of a washer or on another dryer.
  - Control panels can be assembled between both drums for better ergonomics.
- Ideal for multiple solutions: hotels, hostels, campings, coin laundries, facility services (mops), gyms, etc.

### EFFICIENCY

- iDRY: humidity sensor.
- Optimised airflow.
- Wide fluff filter as drawer.
- Efficient design.

### ROBUSTNESS

- Outer casing in grey skinplate.
- Robust aluminium big door.
- Drawer as fluff filter. (not in the door but as a specific drawer)
- Industrial fan and powerful airflow.
- Sturdy construction of the dryer structure and panels.

### OTHERS

- FULL SCREEN FILTER: drawer fluff filter, not in the door.
- CE approved product.
- New gas heated models.


## OPTIONS

- FagorKconnect - IoT: communication kit.
- Stainless steel outer casing.
- AISI 304 stainless steel drum.
- Reversing door opening.
- Tropicalized model: protected board.
- Plinth for better ergonomics.
- Plinth for better ergonomics in stainless steel.
- Control panel mounted below. (stacked dryer)
- Maritime voltage 440V III 50/60 Hz No neutral.
- Coin/token kit.

TECHNICAL DATA

PROFESSIONAL DRYERS | ADVANCE | SRP-08/10 TP2

	UNIT	SRP-08 TP2		SRP-10 TP2	
<b>CAPACITY &amp; DRUM</b>					
Capacity 1:20	Kg	8		10	
Volume (litres)	l	160		200	
Drum diameter Ø	mm	590		590	
Drum depth	mm	585		690	
<b>DOOR</b>					
Height center door	mm	554		554	
Height base door	mm	320		320	
Door diameter	mm	480		480	
<b>GENERAL DETAILS</b>					
Touch II Control	-	Touch screen 4,3"		Touch screen 4,3"	
USB connection	-	Yes		Yes	
Construction	-	Skinplate panels		Skinplate panels	
Plinth	-	OPT		OPT	
Coin laundry version	-	Yes		Yes	
Noise level	dB	62		62	
<b>POWER</b>					
Motor	kW	0,37		0,37	
Electric heating	kW	6,75 / 4,5		6,75 / 4,5	
<b>CONNECTIONS</b>					
		<b>ELECTRIC</b>	<b>GAS</b>	<b>ELECTRIC</b>	<b>GAS</b>
Tension 230V I+N+T 50Hz / 60Hz	Nº x mm2/A	3 x 10+T / 32A	3 x 1,5 / 10A	3 x 10 / 32A	3 x 1,5 / 10A
Tension 230V III+T 50Hz / / 60Hz	Nº x mm2/A	4 x 2,5 / 20A	3 x 1,5 / 10A	4 x 2,5 / 20A	3 x 1,5 / 10A
Tension 400V III+N+T 50Hz / / 60Hz	Nº x mm2/A	5 x 1,5 / 10A	3 x 1,5 / 10A	5 x 1,5 / 10A	3 x 1,5 / 10A
Tension 440 III+T 60Hz	Nº x mm2/A	5 x 1,5 / 11A	2 x 1,5 / 10A	5 x 1,5 / 11A	2 x 1,5 / 10A
Tension 460/480 III+T 60Hz	Nº x mm2/A	5 x 1,5 / 10A	2 x 1,5 / 10A	5 x 1,5 / 10A	2 x 1,5 / 10A
Fume exhaust Ø	mm	100		100	
Maximum airflow	m³/h	300		300	
Optimal airflow	m³/h	200		200	
Outlet pressure	mbar	1,6		1,6	
<b>CONNECTIONS</b>					
Electric heating consumption	kW	6,75 / 4,5		6,75 / 4,5	
Average propane gas consumption	kg/h	0,45		0,45	
Average natural gas consumption	m3/h	0,46		0,46	
<b>DIMENSIONS / PACKING DIMENSIONS</b>					
Net width / Gross width	mm	680 / 710		680 / 710	
Net Depth / Gross Depth	mm	722 / 832		775 / 832	
Net Height / Gross Height	mm	1056 / 1141		1056 / 1141	
Net weight / Gross weight	kg	89 / 101		93 / 104	
Volume	m³	0,67		0,67	

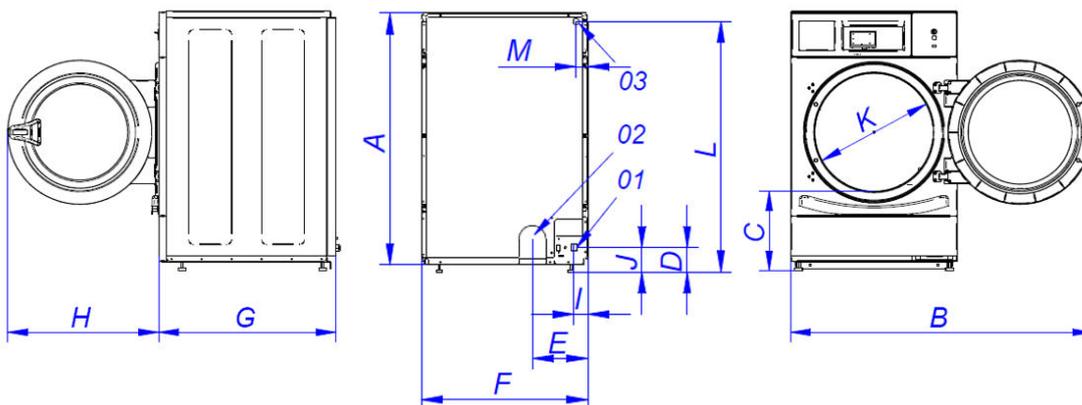

	A	B	C	D	E	F	G	H	I	J	K	L	M
SRP-08 TP2	1056	1227	320	140	226	680	722	615	57	91	480	1015	50
SRP-10 TP2	1056	1227	320	140	226	680	722	615	57	91	480	1015	50