



# SIMSIRIKIS

CATERING & LAUNDRY EQUIPMENT  
SHIP SUPPLIES



## DRYING

## SINGLE POCKET DRYERS ECONOMIC LINE SC-18/22 M



### CHARACTERISTICS

#### M PROGRAMMER

- New M programmer: push buttons to control temperature and time

#### OUTSTANDING FEATURES

- Reversing drum action as standard
- Frequency inverter as standard
- Galvanized drum as standard

#### EFFICIENCY

- Big fluff filter

#### VERSATILITY

- Make to order - customisation
- OPL > Multivending - Standard OPL model easily transformable to coin laundry uses

#### ERGONOMICS

- Drawer as fluff filter, made of stainless steel
- Biggest door diameters
- Opening sense of door adjustable on site

#### MAINTENANCE

- Hinged panel: easy and ergonomic access
- Technical menu: statistics, alarm, autotest, data recovery for technicians and maintenance with M console

#### OTHERS

- White painted panels
- COOL DOWN - anti-wrinkle at the end of the cycle
- Heating options: electric, gas and steam
- CE approved


### OPTIONS

- Opposite door opening
- M programmer display
- Back panel external air + filter
- Reduced power (12 kw instead of 18 kw) for electric heated SR-14 model
- Ship voltage for electric models: 440V III 50/60 Hz No neutral
- Other voltages available

# TECHNICAL DATA

## SINGLE POCKET DRYERS | ECONOMIC LINE | SC-18/22 M

	UNIT.	SC-18 M	SC-22 M		
<b>CAPACITY</b>					
Capacity 1/18	Kg	18,3	24,3		
Capacity 1/20	Kg	16,5	21,9		
Hourly Output (electr // gas)	Kg/h	28,3 // 31,9	34 // 40		
Evaporation capacity (electr // gas)	l/h	14,10 // 16,30	17 // 20		
<b>DRUM</b>					
Ø Drum	mm	750	835		
Ø Door	mm	574	574		
Door center height	mm	976	1.030		
Load hole bottom height	mm	689	743		
Drum length	mm	746	800		
Drum volume	l	330	438		
<b>POWER</b>					
Drum motor power	Kw	0,37	0,37		
Fan motor power	Kw	0,25	0,55		
Electric heating power	Kw	18	24		
Total electric power (elec.model)	Kw	18,67	24,97		
Gas heating power	Kw	20,51	31		
Total electric power (gas model)	Kw	0,67	0,97		
Steam heating power	Kw	30	49,2		
Total electric power (steam model)	Kw	0,67	0,97		
<b>CONNECTIONS</b>		<b>ELECTRICAL</b>	<b>GAS</b>	<b>ELECTRICAL</b>	<b>GAS</b>
Tension 230V - I + N + T	Nº x mm2 / A	-	3 x 1,5 / 20A	-	3 x 1,5 / 20A
Tension 230V - III + T	Nº x mm2 / A	4 x 16 / 63A	3 x 1,5 / 20A	4 x 25 / 80A	3 x 1,5 / 20A
Tension 400V - III + N + T	Nº x mm2 / A	5 x 10 / 32A	3 x 1,5 / 20A	5 x 10 / 40A	3 x 1,5 / 20A
Ø Gas inlet	BSP	1/2"		1/2"	1/2"
<b>DIMENSIONS / PACKING DIMENSIONS</b>					
Net width / Gross width	mm	785 / 865		890 / 970	
Net Depth / Gross Depth	mm	1.125 / 1.210		1.255 / 1.345	
Net Height / Gross Height	mm	1.694 / 1.840		1.812 / 1.940	
Height without heating battery	mm	-		-	
Net weight / Gross weight	Kg	187 / 200		210 / 230	
<b>OTHERS</b>					
Max airflow	m3/h	850		1.200	
Ø Fume exhaust	mm	200		200	
Sound level	dB	64		65	

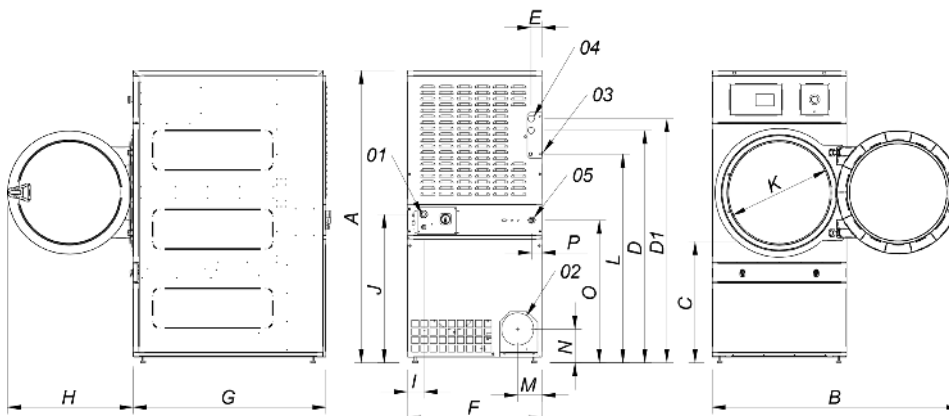

- 01 POWER SUPPLY
- 02 FUMES OUTPUT Ø200
- 03 GAS INLET 1/2"
- 04 STEAM INLET 3/4"
- 04 STEAM INLET 1" (SC-23)
- 05 CONDENSATE OUTLET 3/4"
- 05 CONDENSATE OUTLET 1" (S C-23)
- 06 SPRINKLER VALVE 3/4"

	A	B	C	D	D1	E	E1	F	G	H	I	J	K	L	M	N	O	P
SC-18	1694	1447	689	1354	1422	68	68	785	1125	735	95	870	575	1226	133	180	830	65
SC-22	1812	1552	743	1430	1532	112	55	890	1255	735	95	920	575	1344	238	180	885	65