



DRYING

STACK DRYERS CONCEPT SR-2-11/14/18 M

CHARACTERISTICS

M PROGRAMMER

- New M programmer: push buttons to control temperature and time.

OUTSTANDING FEATURES

- Reversing drum action as standard.
- Stainless steel drum as standard.
- Frequency inverter as standard.

EFFICIENCY

- MIXED FLOW - mixed axial-radial airflow.
- Big fluff filter.

VERSATILITY

- Make to order - customisation.
- OPL > Multivending - Standard OPL model easily trasformable to coin laundry uses.

ERGONOMICS

- Drawer as fluff filter, made of stainless steel.
- Biggest door diameters.

MAINTENANCE

- Hinged panel: easy and ergonomic access.
- Technical menu: statistics for technicians and maintenance with external console (with console option).

OTHERS


- Grey skinplate outer casing, stainless steel look.
- FK - Integrated Fire Extinguishing System.
- SOFT TOUCH - new drum with stamped holes.
- COOL DOWN - anti-wrinkle at the end of the cycle.
- Heating options: electric, gas.
- CE approved.

OPTIONS

- Screen in M programmer (2 units).
- Double dooglass.
- Fluff filter grid 0,3 mm (standard in STACK is 0,6 mm)
- Stainless steel front and side panels.
- Front panel in stainless steel.
- Maritime ooden packing.
- Ship voltage for electric models: 440V III 50/60 Hz No neutral.
- Other voltages available



TECHNICAL DATA		UNIT.	SR-2-11 M		SR-2-14 M		SR-2-18 M	
CAPACITY								
Capacity 1/18	Kg	24		30		36		
Capacity 1/20	Kg	22		28		34		
Hourly Output (electr // gas)	Kg/h	31,6 // 30,6		34,4 // 33,8		36,2 // 36		
Evaporation capacity (electr // gas)	l/h	15,8 // 15,3		17,2 // 16,9		18,1 // 18		
DRUM								
Ø Drum	mm	750		750		750		
Ø Door	mm	574		574		574		
Door center height	mm	547 / 1.522		547 / 1.522		547 / 1.522		
Load hole bottom height	mm	260 / 1.235		260 / 1.235		260 / 1.235		
Drum length	mm	475		610		746		
Drum volume	l	210		269		330		
POWER								
Drum motor power	Kw	0,37 x 2		0,37 x 2		0,37 x 2		
Fan motor power	Kw	0,25 x 2		0,25 x 2		0,25 x 2		
Electric heating power	Kw	12 x 2		12 x 2		12 x 2		
Total electric power (elec.model)	Kw	25,34		25,34		25,34		
Instant propane gas consumption (G31)	Kw	12 x 2		12 x 2		12 x 2		
Instant natural gas consumption (G20)	Kg/h	1,03 x 2		1,03 x 2		1,03 x 2		
Gas heating power	m3/h	1,27 x 2		1,27 x 2		1,27 x 2		
Total electric power (gas model)	Kw	1,34		1,34		1,34		
CONNECTIONS		ELECTRIC.	GAS	ELECTRIC.	GAS	ELECTRIC.	GAS	
Tension 230V - I + N + T	N° x mm2 / A	-	3 x 1,5 / 20A	-	3 x 1,5 / 20A		3 x 1,5 / 20A	
Tension 230V - III + T	N° x mm2 / A	4 x 25 / 80A	3 x 1,5 / 20A	4 x 25 / 80A	3 x 1,5 / 20A	4 x 25 / 80A	3 x 1,5 / 20A	
Tension 400V - III + N + T	N° x mm2 / A	5 x 10 / 40A	3 x 1,5 / 20A	5 x 10 / 40A	3 x 1,5 / 20A	5 x 10 / 40A	3 x 1,5 / 20A	
Ø Gas inlet	BSP	1/2"		1/2"		1/2"		
DIMENSIONS / PACKING DIMENSIONS								
Net width / Gross width	mm	785 / 865		785 / 865		785 / 865		
Net Depth / Gross Depth	mm	972 / 1.055		1.106 / 1.189		1.242 / 1.325		
Net Height / Gross Height	mm	1.980 / 2.126		1.980 / 2.126		1.980 / 2.126		
Net weight / Gross weight	Kg	260 / 268		275 / 293		290 / 317		
OTHERS								
Max airflow	m3/h	500 x 2		500 x 2		500 x 2		
Ø Fume exhaust	mm	200		200		200		
Sound level	dB	64		64		64		

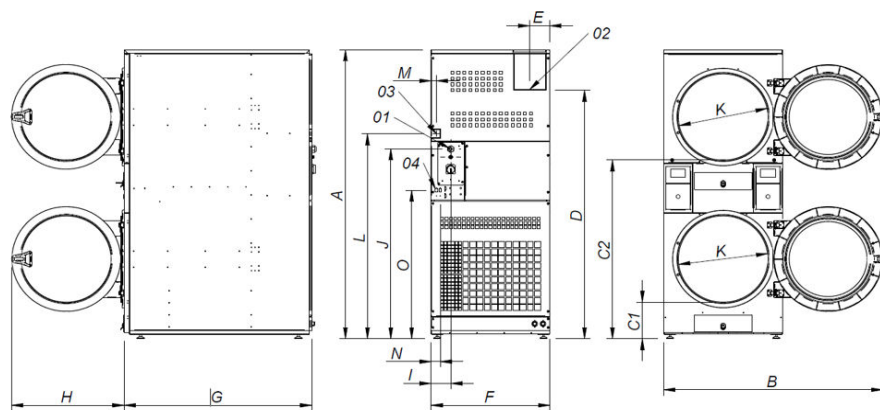

01 ELECTRIC CONNECTION
 02 FUMES OUTPUT Ø200
 03 GAS INLET 1/2"
 04 ETHERNET CONNECTION
 (ONLY TOUCH CONTROL)

	A	B	C1	C2	D	E	F	G	H	I	J	K	L	M	N	O
SR-2-11 M	1980	1447	259	1234	1680	135	785	972	735	130	1275	575	1406	35	60	1018
SR-2-14 M	1980	1447	259	1234	1680	135	785	1106	735	130	1275	575	1406	35	60	1018
SR-2-18 M	1980	1447	259	1234	1680	135	785	1242	735	130	1275	575	1406	35	60	1018