


DRYING

STACK DRYERS POWERED SR/SC-2-18 TP2/M POWERED

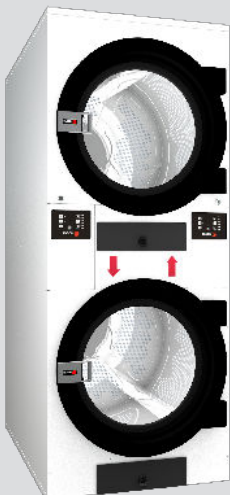

CHARACTERISTICS

SR-2-18 TP2 POWERED

- User friendly and totally programmable 7" TP2
- Reversing drum action as standard
- Stainless steel drum as standard
- New POWERED gas heated model: more power to achieve more productivity.
- OPL > Multivending
- IoT FagorKconnect

SR-2-18 M POWERED

- New M programmer: push buttons to control temperature and time
- Reversing drum action as standard
- Stainless steel drum as standard
- New POWERED gas heated model: more power to achieve more productivity.
- OPL > Multivending

SC-2-18 M POWERED

- New M programmer: push buttons to control temperature and time
- Reversing drum action as standard
- Galvanized drum as standard
- New TURBO gas heated model: more power to achieve more productivity.
- OPL > Multivending

OPTIONS

SR-2-18 TP2 POWERED

- iDRY - Intelligent humidity control.

SR-2-18 M POWERED


- Screen in M programmer

SC-2-18 M POWERED

- Screen in M programmer

TECHNICAL DATA	UNIT	SR-2-18 TP2 POWERED		SR-2-18 M POWERED		SC-2-18 M POWERED	
CAPACITY							
Capacity 1/18	Kg	37		37		37	
Capacity 1/20	Kg	34		34		34	
Hourly Output (gas)*	Kg/h	35,3		35,3		35,3	
Evaporation capacity (gas)*	l/h	70,7		70,7		70,7	
DRUM							
Ø Drum	mm	750		750		750	
Ø Door	mm	574		574		574	
Door center height	mm	547 / 1.522		547 / 1.522		547/1522	
Load hole bottom height	mm	260 / 1.235		260 / 1.235		260/1235	
Drum length	mm	746		746		746	
Drum volume	l	330		330		330	
POWER							
Drum motor power	Kw	0,37x2		0,37x2		0,37x2	
Fan motor power	Kw	0,55x2		0,55x2		0,55x2	
Electric heating power	Kw	-		-		-	
Total electric power (elec.model)	Kw	-		-		-	
Gas heating power	Kw	24x2		24x2		24x2	
Total electric power (gas model)	Kw	1,94		1,94		1,94	
CONNECTIONS		ELECTRICAL	GAS	ELECTRICAL	GAS	ELECTRICAL	GAS
Tension 230V - I + N + T	Nº x mm2 / A	-	3x1,5 / 20A	-	3x1,5 / 20A	-	3x1,5 / 20A
Tension 230V - III + T	Nº x mm2 / A	4x25 / 80A	3x1,5 / 20A	4x25 / 80A	3x1,5 / 20A	4x25 / 80A	3x1,5 / 20A
Tension 400V - III + N + T	Nº x mm2 / A	5x10 / 40	3x1,5 / 20A	5x10 / 40	3x1,5 / 20A	5x10 / 40	3x1,5 / 20A
Ø Gas inlet	BSP	1/2"		1/2"		1/2"	
DIMENSIONS / PACKING DIMENSIONS							
Net width / Gross width	mm	785 / 865		785 / 865		785 / 865	
Net Depth / Gross Depth	mm	1443 / 1457		1443 / 1457		1443 / 1457	
Net Height / Gross Height	mm	1980 / 2126		1980 / 2126		1980 / 2126	
Net weight / Gross weight	Kg	320 / 349		320 / 349		320 / 349	
OTHERS							
Max airflow	m3/h	750x2		750x2		750 x 2	
Ø Fume exhaust	mm	200x2		200x2		200x2	
Sound level	dB	64		64		64	

* It may vary depending on the type of heating, filter cleanliness or extraction type

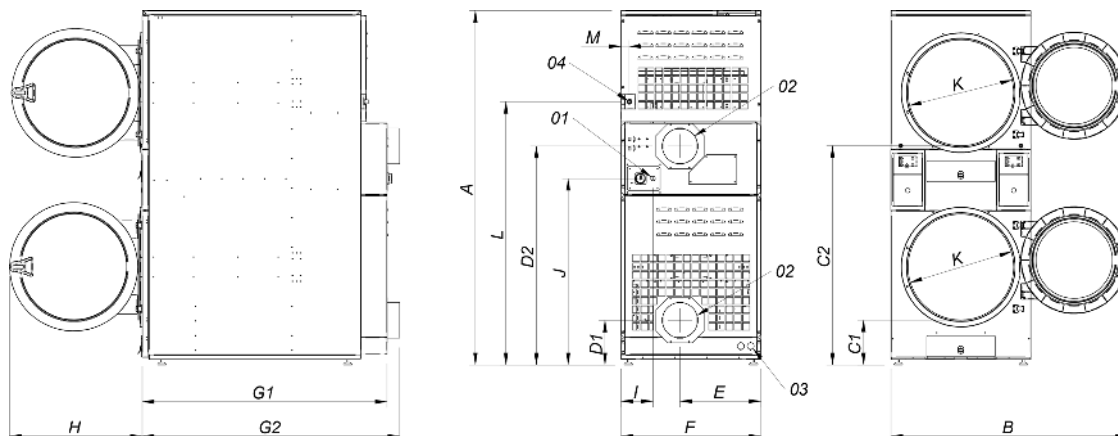

01 ELECTRIC CONNECTION
02 2 FUMES OUTPUT Ø200
03 2 SPRINKLER VALVES 3/4"
04 GAS INLET 1/2"
05 ETHERNET CONNECTION
(ONLY TOUCH CONTROL)

	A	B	C1	C2	D1	D2	E	F	G1	G2	H	I	J	K	L	M
SR-2-18 TP2 POWERED	1980	1447	259	1234	250	1223	454	785	1374	1443	735	180	1017	575	1472	45
SR-2-18 M POWERED	1980	1447	259	1234	250	1223	454	785	1374	1443	735	180	1017	575	1472	45
SC-2-18 M POWERED	1980	1447	259	1234	250	1223	454	785	1374	1443	735	180	1017	575	1472	45