

# SIMSIRIKIS

CATERING & LAUNDRY EQUIPMENT  
SHIP SUPPLIES



## DRYING

## SINGLE POCKET DRYERS ECONOMIC LINE SC-28/35 M



### CHARACTERISTICS

#### M PROGRAMMER

- New M programmer: push buttons to control temperature and time

#### OUTSTANDING FEATURES

- Reversing drum action as standard
- Frequency inverter as standard
- Galvanized drum as standard

#### EFFICIENCY

- Big fluff filter

#### VERSATILITY

- Make to order - customisation
- OPL > Multivending - Standard OPL model easily transformable to coin laundry uses

#### ERGONOMICS

- Drawer as fluff filter, made of stainless steel
- Biggest door diameters
- Opening sense of door adjustable on site

#### MAINTENANCE

- Hinged panel: easy and ergonomic access
- Technical menu: statistics, alarm, autotest, data recovery for technicians and maintenance with M console

#### OTHERS

- White painted panels
- COOL DOWN - anti-wrinkle at the end of the cycle
- Heating options: electric, gas and steam
- CE approved


### OPTIONS

- Opposite door opening
- M programmer display
- Back panel external air + filter
- Reduced power (12 kw instead of 18 kw) for electric heated SR-14 model
- Ship voltage for electric models: 440V III 50/60 Hz No neutral
- Other voltages available

# TECHNICAL DATA

## SINGLE POCKET DRYERS | ECONOMIC LINE | SC-28/35 M

UNIT.		SC-28 M	SC-35 M		
<b>CAPACITY</b>					
Capacity 1/18	Kg	30,5	36,6		
Capacity 1/20	Kg	27,5	33		
Hourly Output (electr // gas)	Kg/h	48,4 // 59,3	60 // 63,9		
Evaporation capacity (electr // gas)	l/h	26,1 // 30,9	31,1 // 32,1		
<b>DRUM</b>					
Ø Drum	mm	947	947		
Ø Door	mm	802	802		
Door center height	mm	1040	1040		
Load hole bottom height	mm	640	640		
Drum length	mm	780	936		
Drum volume	l	549	659		
<b>POWER</b>					
Drum motor power	Kw	0,55	0,55		
Fan motor power	Kw	0,55	0,55		
Electric heating power	Kw	30	36		
Total electric power (elec.model)	Kw	31,15	37,15		
Gas heating power	Kw	41	41		
Total electric power (gas model)	Kw	1,15	1,15		
Steam heating power	Kw	50,1	50,1		
Total electric power (steam model)	Kw	1,15	1,15		
<b>CONNECTIONS</b>		<b>ELECTRICAL</b>	<b>GAS</b>	<b>ELECTRICAL</b>	<b>GAS</b>
Tension 230V - I + N + T	Nº x mm2 / A	-	3 x 1,5 / 20A	-	3 x 1,5 / 20A
Tension 230V - III + T	Nº x mm2 / A	4 x 35 / 100A	3 x 1,5 / 20A	4 x 50 / 125A	3 x 1,5 / 20A
Tension 400V - III + N + T	Nº x mm2 / A	5 x 16 / 63A	3 x 1,5 / 20A	5 x 16 / 63A	3 x 1,5 / 20A
Ø Gas inlet	BSP	1/2"		1/2"	
<b>DIMENSIONS / PACKING DIMENSIONS</b>					
Net width / Gross width	mm	985 / 1065		985 / 1065	
Net Depth / Gross Depth	mm	1054 / 1154		1210 / 1310	
Net Height / Gross Height	mm	1975 / 2080		1975 / 2080	
Net weight / Gross weight	Kg	230 / 260		260 / 285	
<b>OTHERS</b>					
Max airflow	m3/h	1200		1200	
Ø Fume exhaust	mm	200		200	
Sound level	dB	65		65	

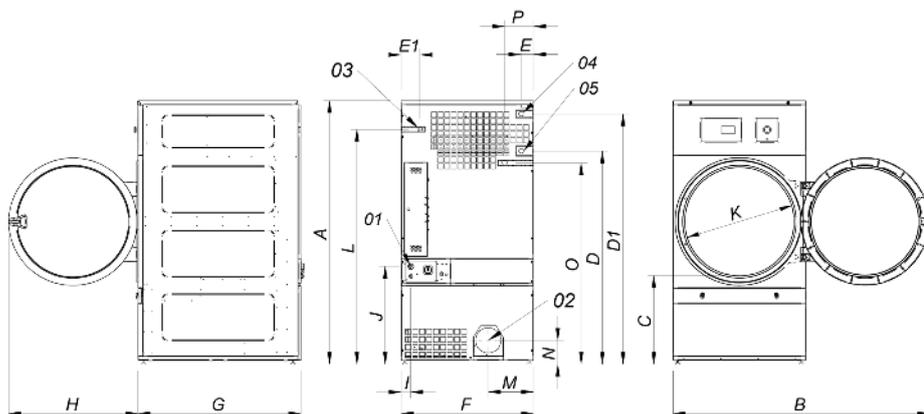

- 01 POWER SUPPLY
- 02 FUMES OUTPUT Ø200
- 03 GAS INLET 1/2"
- 04 STEAM INLET 1"
- 05 CONDENSATE OULET 1"
- 06 SPRINKLER VALVE 3/4"

	A	B	C	D	D1	E	E1	F	G	H	I	J	K	L	M	N	O	P
SC-28	1975	1910	660	1590	1875	102	130	985	1054	970	70	730	802	1760	337	178	1510	215
SC-35	1975	1910	660	1590	1875	102	130	985	1210	970	70	730	802	1760	337	178	1510	215